

SUPER SOCCER

assembly instructions

1. Upon receipt of your "Super Soccer" game, please note any shipping damages. If you should find any, please contact the delivering carrier immediately so that you can file the necessary claim.
2. Legs, hardware and all components are packed inside the cabinet.
3. To remove playfield open & remove service door on end of cabinet. Playfield can then be slid out of cabinet exposing inside of game.
4. When bolting each leg in place, make sure that all 3 bolts are used for each leg.
5. Follow the diagram exactly for the proper placement of the rods and men. The diagram indicates the number of holes in each rod, so you will know where to place each rod.
6. Each rod is inserted through the first bearing hole, then a nylon spring is placed on it. The proper number of men are then slipped onto that rod, and the second nylon spring is added. After passing the rod through the second bearing hole, place the plastic bumper on the end of the rods.

- Note: The two goalie rods also get 2 collars each. The diagram illustrates how the players are secured to the rods.

7. The ball entry cups are screwed to the inside of the cabinet, for shipping. Unscrew these cups and rescrew them to the outside of the cabinet, using the same screws.

DE LUXE ENCLOSED MODEL

All the preceding steps also apply to the DeLuxe Enclosed Model, but, of course, the glass must first be removed before assembling the rods.

TO REMOVE GLASS

- a. Remove two rubber K buttons from top of end frame.
- b. Remove two bolts now exposed and end frame can be removed.
- c. Slide glass out.

TO REMOVE PLAYFIELD


- a. Open service door on end of cabinet and slide playfield out.

IMPORTANT

Be sure to depress round aluminum ball lift until hole in playfield passes it. Failure to do so can cause damage when sliding playfield back into game.

Five extra balls must be in the game at all times i.e. if you are running the game on 11 balls you need 16 balls in the game; if you are running with 9 balls you will need 14.

Remove ball cup from inside of playfield and install it on the other side of cabinet.

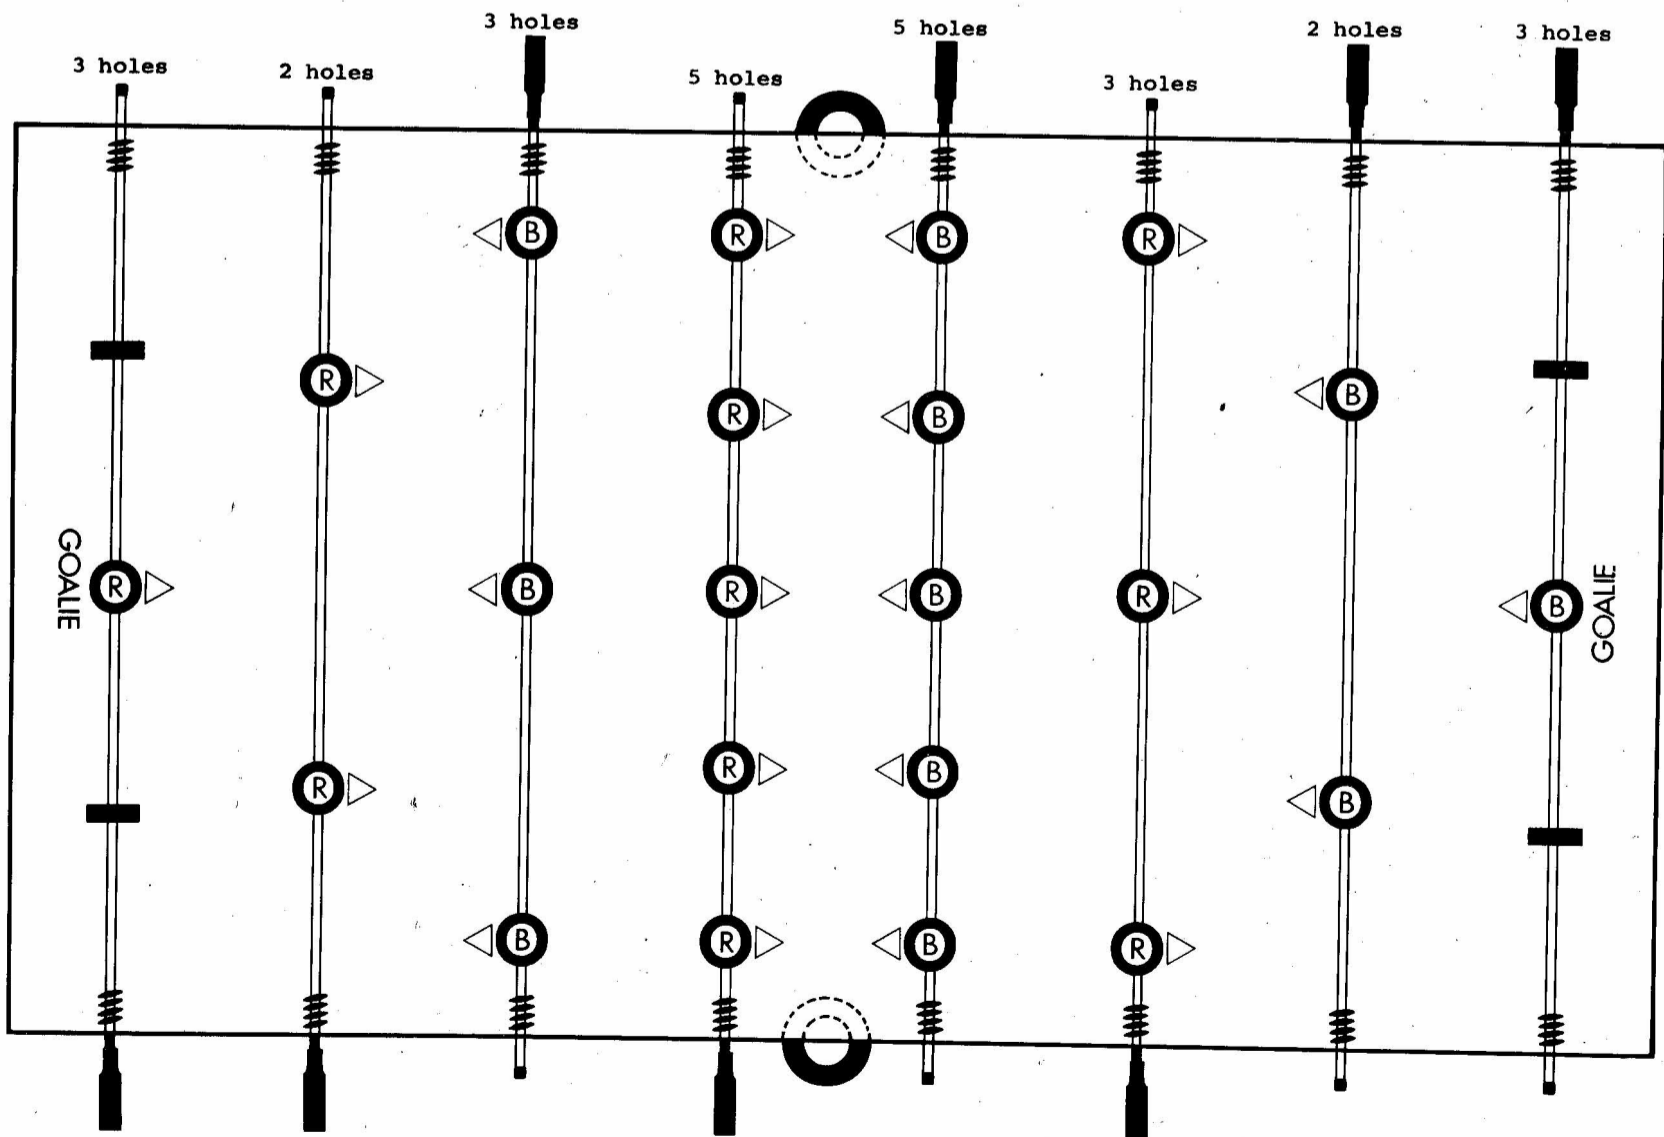

(B) blue men (R) red men nylon springs collars handles plastic bumpers ball entry cup

fastening player to rod
special screw elastic lock nut

